



COLLABORATE19

TECHNOLOGY AND APPLICATIONS FORUM
FOR THE ORACLE COMMUNITY

Conquer Big Data with Oracle 18c, In-Memory External Tables and Analytic Functions

Session ID:

117

Prepared by:

Jim Czuprynski

Enterprise Data Architect

Viscosity NA

@JimTheWhyGuy

April 10, 2019

Remember to complete your evaluation for this session within the app!

#C19TX

My Credentials

- 35+ years of database-centric IT experience
- Oracle DBA since 2001
- Oracle 9i, 10g, 11g, 12c OCP
- Oracle ACE Director
- 100+ articles on databasejournal.com and IOUG SELECT
- Co-author of 4 Oracle books
- Oracle-centric blog ([Generally, It Depends](http://jimczuprynski.wordpress.com))
- Regular speaker at Oracle OpenWorld, IOUG COLLABORATE, KSCOPE, and Regional OUGs



- **E-mail** me at jim.czuprynski@viscosityna.com
- Check out my **blog**: <http://jimczuprynski.wordpress.com>
- Follow me on **Twitter**: @JimTheWhyGuy
- Connect with me on LinkedIn: **Jim Czuprynski**

Our Agenda

- Big Data and IoT: Zettabytes, Here We Come!
- In-Memory External Tables: Crunching Through Data at Lightspeed
- Example: Using Oracle 18c to Analyze Credit Scoring Data
- New Analytic Functions: Close Enough For What We're Doing
- Previews of Coming Attractions

Big Data and IoT: Zettabytes, Here We Come!

Big Data, the Internet of Things (IoT), and Analytics
have arrived for real ... and human civilization
is already impacted tremendously

Some *amazing statistics* to *consider* ...

- **Big Data:** 4.4 ZettaBytes in 2013, **44** ZettaBytes by 2020
- **IoT:** 25 billion devices in 2015, **50 billion** by 2020
- **6.4 Billion** connections between IOT devices by 2025



... and be *nervous about*!


- Huge amount of sensitive data needs to be secured and protected
- Even though unstructured data abounds in data lakes, the biggest challenge is figuring out what data is **information** and which is **dreck**
- **How do we tie existing datasets in RDBMS format to these new sources?**

Big Data and Analytics: More Prevalent Than Ever

Big Data is now being analyzed in real time, and our civilization is never going to be the same again.

Predictive Analytics are *already* driving social change in real time

- **Immigration:** DHS contemplating use of **credit scores** to determine immigration cases
- **Politics:** Building a **truth engine** to assess veracity of spreading news stories
- **Criminal Justice:** Chicago police leveraging **threat scores** during traffic stops
- **Civic Duty:** China's new **social credit** system

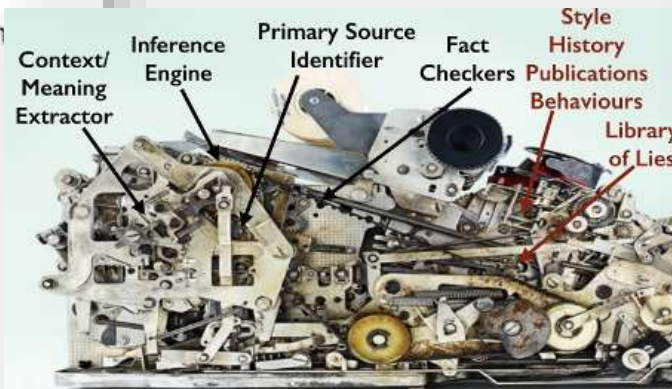

COLLABORATE19
TECHNOLOGY AND APPLICATIONS FORUM
FOR THE ORACLE COMMUNITY

The Sharper Knife You Already Own: The Case for SQL vs. NoSQL

Today, *NoSQL databases* are like *avocado toast* ...

- **MongoDB** leverages key-value pairs stored within JSON documents
- **HDFS** (file system) and **HIVE** (database) use syntax *similar* to traditional Oracle SQL, but just different enough to introduce confusion
- Oracle even offers its own NoSQL database



... but sometimes, you just gotta have *steak and eggs!*

- Oracle SQL is **already** considerably robust
- Oracle 12cR1: Read **directly** from JSON documents, HDFS files, and HIVE tables
- Oracle 12cR2: **Partitioned** external tables for faster processing
- Oracle 18c: **In-Memory** external tables

What if you could shorten your developers' learning curve ...
by eliminating it?



COLLABORATE19

TECHNOLOGY AND APPLICATIONS FORUM
FOR THE ORACLE COMMUNITY




#C19TX

In-Memory External Tables: A Primer

In-Memory External Tables (IMXT)

NEW IN
18^c

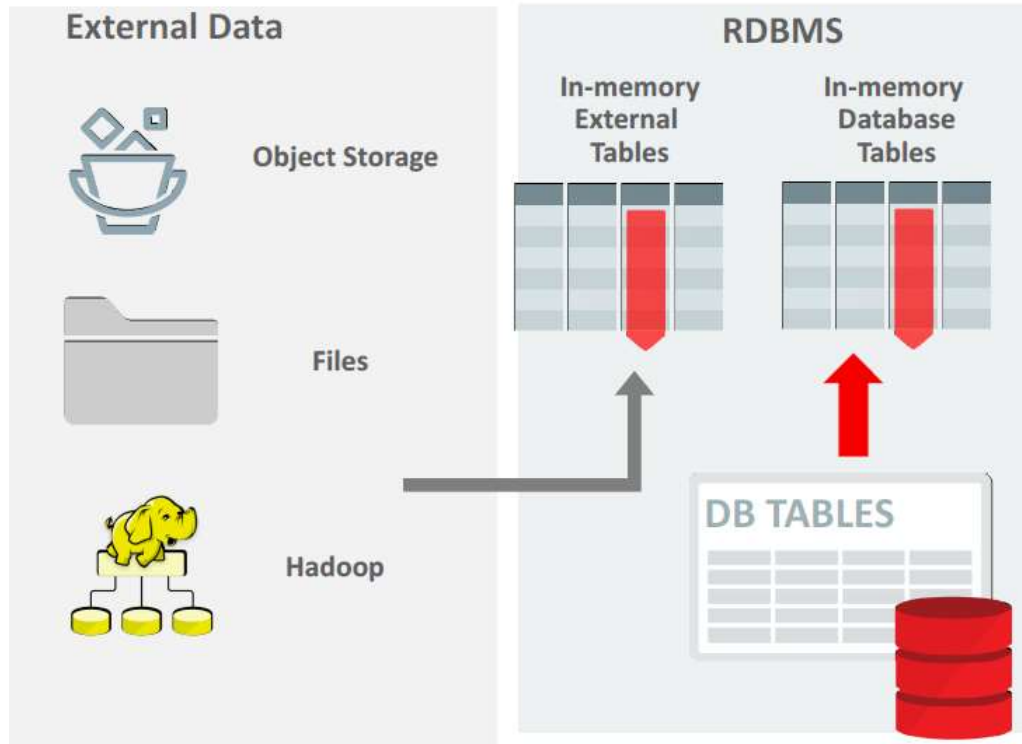


In-Memory External Tables (IMXT)

- Allows transparent access to data outside a traditional Oracle database
- Builds in-memory column cache of outside data
- Enables uber-fast analytics against external tables
- All in-memory optimizations apply, including vector processing and JSON expressions
- Tests promise potential performance improvement of as much as **100X**

In-Memory External Tables: Use Cases

Consider the data relationships between **customers**, **address** information, **demographics**, and **credit ratings**:

- Credit ratings encompasses a comparatively large amount of data that is probably undesirable to load into ORGANIZATION HEAP internal database tables
- Credit ratings are comparatively temporary data that's just needed for a brief analysis
- Ratings data spans several narrow but deep CSV-formatted files

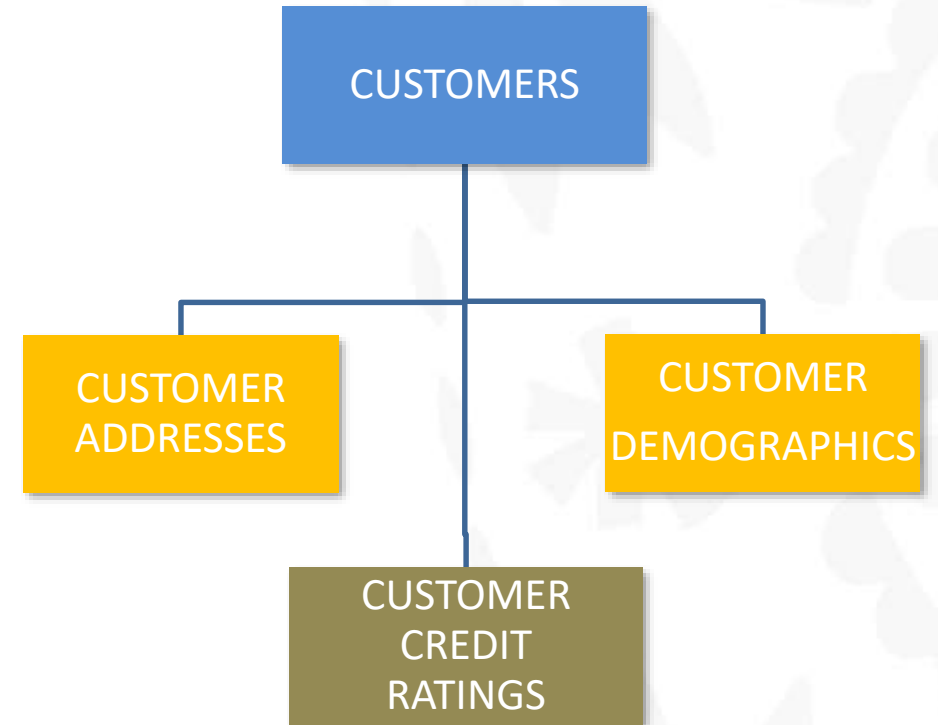

Creating IMXTs

```
SQL> CREATE TABLE tpcds.imet_customer_credit_ratings (  
    ccr_customer_number      NUMBER(8)  
    , ccr_last_reported      TIMESTAMP  
    , ccr_credit_rating      NUMBER  
    , ccr_missed_payments    NUMBER  
    , ccr_credit_maximum     NUMBER  
)  
  ORGANIZATION EXTERNAL (  
    TYPE ORACLE_LOADER  
    DEFAULT DIRECTORY imet_dir  
    ACCESS PARAMETERS (  
      RECORDS DELIMITED BY NEWLINE  
      FIELDS TERMINATED BY ',' (  
        ccr_customer_number      CHAR(07)  
        , ccr_last_reported      CHAR(20)  
        DATE_FORMAT DATE MASK "DD-MON-YYYY HH24:MI:SS"  
        , ccr_credit_rating      CHAR(03)  
        , ccr_missed_payments    CHAR(01)  
        , ccr_credit_maximum     CHAR(06)  
      )  
    )  
  )  
  . . .
```

EXTERNAL
TABLE driver

Directory on Oracle
Database host

Row formatting
parameters

```
. . .  
LOCATION (  
    ' ccr_1998.csv'  
    , ' ccr_1999.csv'  
    , ' ccr_2000.csv'  
    , ' ccr_2001.csv'  
    , ' ccr_2002.csv'  
)  
);
```

File names

Table created.

```
BEGIN  
  DBMS_STATS.GATHER_TABLE_STATS (  
    ownname => 'TPCDS'  
    , tabname => 'imet_customer_credit_ratings'  
    , degree => 4);  
END;  
/
```

IMXTs: Activation and Population

```
SQL> ALTER TABLE tpcds.imet_customer  
INMEMORY  
PRIORITY HIGH  
MEMCOMPRESS FOR QUERY LOW;
```

ORGANIZATION
HEAP tables

Needed for
activities
against IMXTs!

```
ALTER TABLE tpcds.imet_customer_addr  
INMEMORY  
PRIORITY HIGH  
MEMCOMPRESS FOR QUERY LOW;
```

```
ALTER TABLE tpcds.imet_customer_demo  
INMEMORY  
PRIORITY HIGH  
MEMCOMPRESS FOR QUERY LOW;
```

```
ALTER TABLE tpcds.imet_customer_cred  
INMEMORY  
MEMCOMPRESS FOR QUERY LOW;
```

```
ALTER SESSION  
SET QUERY_REWRITE_INTEGRITY = stale_tolerated;  
  
BEGIN  
  DBMS_INMEMORY.POPULATE (  
    schema_name => 'TPCDS'  
    ,table_name => 'IMET_CUSTOMER_CREDIT_RATINGS'  
  );  
END;  
/
```

Initiates IMXT
population

ORGANIZATION EXTERNAL table.
Note absence of PRIORITY attribute!



IMXTs: Tracking IMCS Population and Usage

```
SQL> SELECT
      SS.name
    ,MS.value
  FROM
    v$sysstat SS
  ,v$mystat MS
 WHERE SS.statistic =
    AND MS.value > 0
    AND (SS.name LIKE 'IM%'
 ORDER BY SS.name;
```

How much IMCS-related activity is being generated while I'm running a query against IMXTs or normal tables in IMCS?

```
,ROUND (( (use
(SEL
FROM v$inmemory_
```

In-Memory Session-Level Statistics (v\$MYSTAT)

Statistic Name

Statistic
Value

IM scan CUs columns accessed	240
IM scan CUs columns theoretical max	525
IM scan CUs memcompress for query low	105
IM scan CUs pcode pred evaled	105
IM scan CUs split pieces	112
IM scan bytes in-memory	484,622,076
IM scan bytes uncompressed	649,335,277
IM scan rows	26,101,901
IM scan rows projected	220,905
IM scan rows valid	26,101,901
IM simd compare calls	105
IM simd decode calls	968
IM simd decode selective calls	968



IMXTs: Crunching Through Data at Lightspeed

```
SQL> ALTER SESSION SET QUERY_REWRITE_INTEGRITY = stale_tolerated;
```

```
SQL> ALTER SESSION SET inmemory_query = ENABLE;
```

```
SQL> SELECT
    ccr_missed_payments
  ,MIN(ccr_credit_rating)
  ,AVG(ccr_credit_maximum)
  ,COUNT(*)
  FROM tpcds.imet_customer_credit_ratings
 WHERE ccr_last_reported <= TO_TIMESTAMP('2000-03-31', 'yyyy-mm-dd')
    AND ccr_last_reported >= TO_TIMESTAMP('1999-04-01', 'yyyy-mm-dd')
 GROUP BY ccr_missed_payments
 ORDER BY ccr_missed_payments
```

Leveraging the IMXT
that's populated in IMCS
improved performance by
almost **20X**

processed in
less than 51 seconds from flat files

Elapsed: 00:00:02.45

Id	Operation	Name	Rows	Bytes	Cost (%CPU)	Time
0	SELECT STATEMENT		5	115	24559 (2)	00:00:01
1	SORT GROUP BY		5	115	24559 (2)	00:00:01
* 2	EXTERNAL TABLE ACCESS INMEMORY FULL	IMET_CUSTOMER_CREDIT_RATINGS	5220K	114M	24393 (1)	00:00:01

Predicate Information (identified by operation id):

```
2 - inmemory("CCR_LAST_REPORTED"<=TIMESTAMP' 2000-03-31 00:00:00' AND "CCR_LAST_REPORTED">=TIMESTAMP'
    1999-04-01 00:00:00')
    filter("CCR_LAST_REPORTED"<=TIMESTAMP' 2000-03-31 00:00:00' AND "CCR_LAST_REPORTED">=TIMESTAMP'
    1999-04-01 00:00:00')
```

IMXTs: Relevant Metadata

External Table Attributes	
View	Description
{USER ALL DBA}_TABLES	Lists tables, including EXTERNAL tables and their INMEMORY status
{USER ALL DBA}_TAB_COLUMNS	Lists table columns, including those for EXTERNAL tables
{USER ALL DBA}_EXTERNAL_TABLES	Lists all EXTERNAL tables
{USER ALL DBA}_EXTERNAL_LOCATIONS	Shows file locations for EXTERNAL tables
V\$INMEMORY_AREA	Monitors utilization of IMCS space at SMU, IMCU, and IMEU levels, including progress of ongoing (re)population
V\$INMEMORY_SEGMENT	Tracks which internal and external table segments are populated within the IMCS



COLLABORATE19

TECHNOLOGY AND APPLICATIONS FORUM
FOR THE ORACLE COMMUNITY



#C19TX

**New Analytic
Capabilities:
Close Enough For
What We're Doing**

Top-N Approximate Aggregation Functions

Top-N Queries can leverage **APPROX_COUNT()**, **APPROX_SUM()**, **APPROX_RANK()**

```
SELECT
  ca_state
,ca_zip
,APPROX_COUNT(c_customer_sk) p
,APPROX_SUM(cd_dep_count) depe
,APPROX_RANK(
  PARTITION BY ca_state
  ORDER BY APPROX_COUNT(c_cust
  AS rnk_by_cust_count
,APPROX_RANK(
  PARTITION BY ca_state
  ORDER BY APPROX_SUM(cd_dep_c
  AS rnk_by_dep_count
FROM
  tpcds.customer
,tpcds.customer_address
,tpcds.customer_demographics
```

```
. . .
WHERE c_current_addr_sk = ca_address_sk
AND c_current_cdemo_sk = cd_demo_sk
AND ca_state IN ('IL','IN','WI')
AND ca_zip IS NOT NULL
GROUP BY
  ca_state
,ca_zip
HAVING APPROX_RANK(
  PARTITION BY ca_state
  ORDER BY APPROX_COUNT(c_customer_sk) DESC) <= 5
AND APPROX_RANK(
  PARTITION BY ca_state
  ORDER BY APPROX_SUM(cd_dep_count) DESC) <= 10
ORDER BY
  ca_state;
```

Note that **both** of the windowing computations are usable as filters in the **HAVING** clause!

For more details on 18c Top-N APPROX functions, take a look at http://bit.ly/18c_APPROX

Analytic Views: Enhancements in 18c

Analytic Views (AVs) are fast becoming a crucial underpinning of Big Data SQL and real-time analytic technology.

Enhancements in Oracle 18c include:

- Support for Excel **MDX** format
- Ranking and statistical functions (**RANK_***, **COVAR_***, **STATS_***, **PERCENTILE_***)
- Hierarchical expressions (**HIER_DEPTH**, **HIER_LEVEL**, **HIER_MEMBER_NAME**)
- Dynamic definition of calculations within SQL queries
- Broader support beyond star schemas (snowflake and flat denormalized fact tables)

Check out http://bit.ly/18c_AVs for information on 18c Analytic View enhancements



Analytic Views: FILTER FACT and ADD MEASURE

```
WITH av_ffam ANALYTIC VIEW AS (  
  USING tpcds.av_mkt_geo_sales  
  HIERARCHIES (avhy_dates, avhy_geography)  
  FILTER FACT (  
    avhy_dates  
    TO level_name = 'QUARTER'
```

FILTER FACT removes data from consideration before it's submitted for aggregation

```
    STRICT  
    LIKE '%South%')  
  ADD MEASURE (  
    prior_period_qty AS  
      (LAG(fct_qty)  
       OVER (HIERARCHY avhy_dates OFFSET 1))  
    ,prior_period_pctchg AS  
      (LAG_DIFF_PERCENT(fct_qty)  
       OVER (HIERARCHY avhy_dates OFFSET 1))  
  )  
)
```

The **WITH** clause is now supported within a calling SQL statement

```
...  
SELECT  
  avhy_dates.level_name time_level  
  ,avhy_dates.member_name time_range  
  ,avhy_geography.level_name geo_level  
  ,avhy_geography.member_name geo_range  
  ,fct_qty  
  ,prior_period_qty  
  ,prior_period_pctchg  
FROM av_ffam  
  HIERARCHIES (avhy_dates  
               ,avhy_geography)  
WHERE avhy_dates.level_name IN  
      ('ALL', 'YEAR', 'QUARTER', 'MONTH')  
  AND avhy_g...  
ORDER BY  
  avhy_dates...  
  ,avhy_geography...  
;
```

It's now possible to add new **MEASUREs** without having to recreate the entire AV





COLLABORATE19

TECHNOLOGY AND APPLICATIONS FORUM
FOR THE ORACLE COMMUNITY



#C19TX

Oracle 19c: A Preview of Even More Power

ORGANIZATIO
TYPE ORAC
DEFAULT D
ACCESS PA
RECORDS
FIELDS

yy-mm-dd'))
yy-mm-dd'))
yy-mm-dd'))

ERROR at line 1:
ORA-30657: operation not supported on external organized table

```
DATE MASK "DD-MON-YYYY HH24:MI:SS"
, ccr_credit_rating          CHAR(10)
, ccr_missed_payment        CHAR(10)
, ccr_credit_maximum        CHAR(10)
```

Placing this table within the IMCS is not allowed in this release.

NEW IN
19c

```
CREATE TABLE tpcds.hypt_credit_ratings (
    ccr_customer_number          INTEGER
    ,ccr_last_report              DATE
    ,ccr_credit_rating            VARCHAR(10)
    ,ccr_missed_payments         NUMBER(8,2)
    ,ccr_credit_max               NUMBER(8,2)
PARTITION BY RANGE(ccr_credit_max)
    PARTITION cc_0 VALUES LESS THAN (0)
        TABLESPACE tbs1
    . . .
    ,PARTITION cc_9 VALUES LESS THAN (9)
        TABLESPACE tbs1
);
```

```
ALTER TABLE tpcds.hypt_customer_credit_ratings
ADD EXTERNAL PARTITION
ATTRIBUTES (
    TYPE ORACLE_LOADER
    DEFAULT DIRECTORY tpcds_hypt_dir
    ACCESS PARAMETERS (
        FIELD TERMINATOR '|'
        ccr_customer_number INT
        ,ccr_last_report DATE
        DA
        ,ccr_credit_rating VARCHAR(10)
        ,ccr_missed_payments NUMBER(8,2)
        ,ccr_credit_max NUMBER(8,2)
    )
);
```

```
ALTER TABLE tpcds.hypt_customer_credit_ratings
ADD PARTITION ccr_10
VALUES LESS THAN (10)
EXTERNAL LOCATION ('tbs1');
```

```
FIELD ALTER TABLE tpcds.hypt_customer_credit_ratings
CCR_ ADD PARTITION ccr_2017
,CCR_ VALUES LESS THAN (TO_DATE('2018-01-01', 'yyyy-mm-dd'))
DA EXTERNAL LOCATION ('CCR_2017.csv');
,CCR_
,CCR_
,CCR_ ALTER TABLE tpcds.hypt_customer_credit_ratings
CCR_ ADD PARTITION ccr_2018
VALUES LESS THAN (MAXVALUE)
EXTERNAL LOCATION ('CCR_2018.csv');
```

Coming in 19c: Expanded Support for IMXT

NEW IN
19c

Big Data and Performance Enhancements for In-Memory External Tables

- In-Memory External Tables add support for ORACLE_HIVE and ORACLE_BIGDATA drivers, parallel query, Oracle Real Application Clusters, Oracle Active Data Guard, and on-demand population.
- By using the new Big Data drivers, you avoid the cost and complexity of materializing data before populating it into the In-Memory Column Store (IM column store). You can use the SQL analytical capabilities of Oracle Database and Database In-Memory to analyze both internal and external data.
- Support for parallel query and full scan population means applications have fewer limitations when accessing data that resides outside the database.

IMXTs: 18c vs. 19c Features

IMXT / DBIM Feature	18c	19c
Are IMXTs populated / repopulated automatically via Automatic In Memory?	No	Yes
Is the PRIORITY clause supported for IMXTs?	No	No
Can I place specific COLUMNS from an IMXT into IMCS?	No	No
Is the DISTRIBUTE directive permitted?	No	Yes
Can the external files reside in HDFS?	No	Yes
Can I partition an IMXT?	No	Yes
Are Join Groups permitted?	No	No
Are In-Memory Expressions supported?	No	No
Is Parallel Execution supported?	No	Yes
Will In-Memory Optimized Arithmetic work for numeric column values?	No	No



References and Resources

Leverage these great resources to increase understanding of and enable experiments in IMXTs, APPROX functions, and Analytic Views for Oracle 18c, 19c, and beyond:

- **DataGenerator:** <https://dominicgiles.com/datagenerator>
- **IMXT 18c Documentation:** http://bit.ly/18c_IMETs
- **IMXT 19c Documentation:** http://bit.ly/19c_IMETs
- **18c APPROX Function Improvements:** http://bit.ly/18c_APPROX
- **18c Analytic View Improvements:** http://bit.ly/18c_AVs





COLLABORATE19

TECHNOLOGY AND APPLICATIONS FORUM
FOR THE ORACLE COMMUNITY

jim.czuprynski@viscosityna.com

Session ID:

117

Remember to complete your evaluation for this session within the app!

#C19TX